



TEMPERATURE CONTROL FOR **TODAY & TOMORROW**



FDU140KXE6F

14.0 KW




Specificații tehnice

Capacitate nominală de răcire		kW	14.0
Capacitate nominala de incalzire		kW	16.0
Sursă de alimentare			Monofazic 220-240V, 50Hz
Consumul de energie	Racire	kW	0.35-0.36
	Incalzire	kW	0.35-0.36
Nivel de presiune sonoră racire		db(A)	P-Hi: 45 Hi:40 Me:34 Lo:29
Dimensiuni exterioare unitate	I x L x A	mm	280x1370x740
Greutate netă		kg	54
Flux de aer		m ³ /min	P-Hi: 39 Hi:32 Me:26 Lo:20
Presiunea statica externa maxima		Pa	200
Aport de aer proaspat			Este posibil
Filtru de aer			Intreaba un specialist ATX HVAC
Telecomanda (opționalal)			Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-KIT4-E2
Dimensiuni țeavă refrigerant		mm(in)	Refrigerant lichid: ø9.52(3/8") Refrigerant gazos: ø15.88(5/8")







TEMPERATURE CONTROL FOR TODAY & TOMORROW

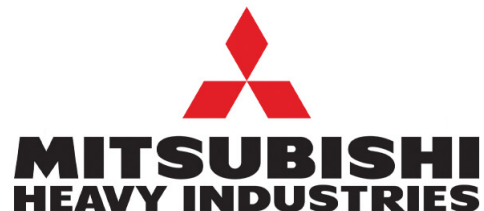

Schema tehnică

FDU112KXE6F, 140KXE6F, 160KXE6F

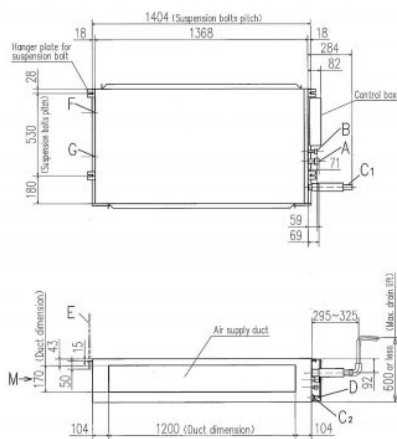

Notes: The model name label is attached on the lid of the control box.

Symbol	Content
A	Cas piping
B	Liquid piping
C1	Drain piping
C2	Drain piping (Gravity drainage)
D	Hole for wiring
E	Suspension bolts
F	Outside air opening for ducting
G	Air outlet opening for ducting
H	Inspection hole

