



TEMPERATURE CONTROL
FOR **TODAY & TOMORROW**



FDU2400FKXZE1
28.0 KW




Specificații tehnice

Capacitate nominală de răcire		kW	28.0
Capacitate nominala de incalzire		kW	21.5
Sursă de alimentare			Monofazic 220-240V, 50Hz
Consumul de energie	Racire	kW	1.16-1.20
	Incalzire	kW	1.16-1.20
Nivel de presiune sonoră racire		db(A)	Hi:45
Dimensiuni exterioare unitate	I x L x A	mm	379x1600x893
Greutate netă		kg	89
Flux de aer		m ³ /min	Hi:40
Presiunea statica externa maxima		Pa	200 (la capacitatea maxima a fluxului de aer)
Filtru de aer			Intreaba un specialist ATX HVAC
Telecomanda (opționalal)			Cu fir: RC-EX3A, RC-E5, RCH-E3 Fara fir: RCN-KIT4-E2
Dimensiuni țeavă refrigerant		mm(in)	Refrigerant lichid: ø9.52(3/8") Refrigerant gazos: ø22.22(7/8")




TEMPERATURE CONTROL FOR TODAY & TOMORROW

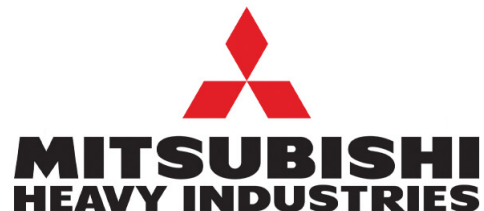

Schema tehnică

FDU1800FKXZE1, FDU2400FKXZE1

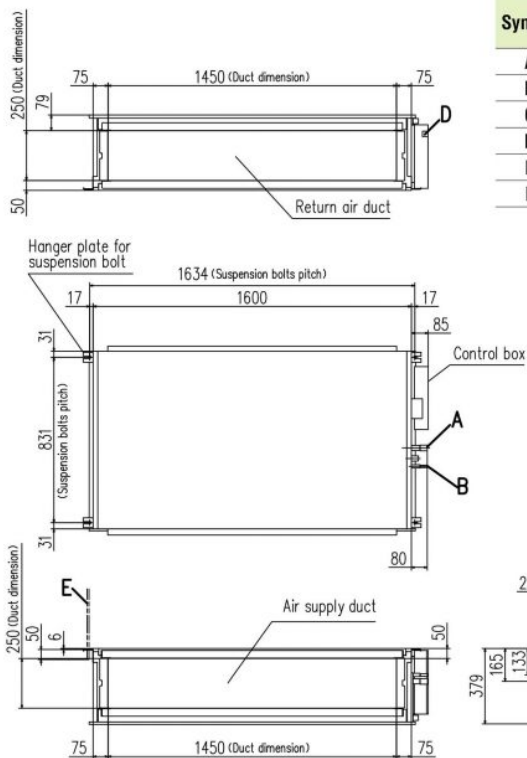

Symbol	Content	1800	2400
A	Gas piping	ø19.05 (3/4")	ø22.22 (7/8")
B	Liquid piping	ø9.52 (3/8") (Brazing)	
C	Drain piping(Gravity drainage)	VP25(O.D.32)	
D	Hole for wiring		
E	Suspension bolts	M10	
F	Inspection hole	(450X450)	

