



TEMPERATURE CONTROL FOR TODAY & TOMORROW



SCM41ZS-W
4.0 KW



Specificații tehnice


R32

Sursă de alimentare			1 Phase, 220 - 240 V, 50Hz/ 220V, 60Hz	
Capacitate nominală de răcire (Min~Max)			kW	4.0(1.4~6.3)
Capacitate nominală de încălzire (Min~Max)			kW	4.5(1.0~6.9)
Consum de energie		Răcire/Încălzire	kW	0.72(0.32~1.65) / 0.81 (0.25~1.58)
EER/COP		Răcire/Încălzire		5.56 / 5.56
Amperaj maxim			A	15
Nivel putere sonoră		Răcire	dB(A)	62
		Încălzire		64
Nivel presiune sonoră		Răcire	dB(A)	49
		Încălzire		52
Flux de aer		Răcire	m ³ /min	41.0
		Încălzire		41.0
Dimensiuni exterioare		Înălțime / Lățime / Adâncime	mm	640Ã850(+65) Ã290
Greutate netă			kg	42.5
Refrigerant		Tip/GWP		R32/675
		Încărcare	kg/TCO2Eq	1.6/1.08
Dimensiuni țeavă refrigerant		Lichid/Gaz	mm/	6.35(1/4")Ã3 / 9.52(3/8")Ã3
Interval de funcționare - temperatură exterioară		Răcire	°C	-15~46
		Încălzire		-15~24
Number of Connectable indoor units				Min. 2 - Max. 3
Capacitatea totală a unităților interne (kW)				7.0




Technical drawing of the front view of a rectangular metal plate. The drawing includes the following dimensions and labels:

- Overall Dimensions:**
 - Width: 850
 - Height: 340
- Top Edge Features:**
 - Top edge radius: 286.4
 - Top edge chamfer: 43.5
 - Top edge hole diameter: 50
 - Top edge hole offset: 12
- Internal Features:**
 - Internal hole diameter: 476
 - Internal hole offset: 203.1
 - Internal hole offset: 510
 - Internal hole offset: 136.9
 - Internal hole offset: 17.9
 - Internal hole offset: 14
 - Internal hole offset: 155 (169.6)
 - Internal hole offset: 14.6
 - Internal hole offset: 312.5
 - Internal hole offset: 325
 - Internal hole offset: 188.1
- Labels:**
 - E:** Points to the top edge chamfer and the top edge hole.
 - D:** Points to the internal hole.
 - Center of gravity:** Points to the center of the internal hole.
 - 2-12x16 Slot hole:** Points to the slot hole on the right side.

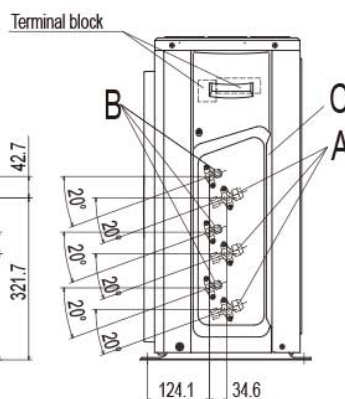

- (1) The unit must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
- (4) Leave 200mm or more space above the unit.
- (5) The wall height on the outlet side should be 1200mm or less.
- (6) The model name label is attached on the right side of the unit.



Unit:mm