



TEMPERATURE CONTROL FOR TODAY & TOMORROW



SCM60ZS-W
6.0 KW



Unitate interna : FDT125VH

Specificații tehnice


R32

Sursă de alimentare			Monofazic, 220 - 240V, 50Hz
Capacitate nominală de răcire (Min~Max)			kW 6.0(1.7~7.5)
Capacitate nominala de incalzire (Min~Max)			kW 6.8(1.0~7.5)
Consumul de energie		Racire/Incalzire	kW 1.32(0.43~2.28) / 1.40(0.32~2.80)
EER/COP		Racire/Incalzire	4.55 / 4.86
Amperaj maxim			A 15
Nivel putere sonoră	Racire		dB(A) 62
	Incalzire		
Nivel presiune sonoră	Racire		dB(A) 50
	Incalzire		
Flux de aer	Racire		m ³ /min 41.0
	Incalzire		
Dimensiuni exterioare		Inaltime x Latime x Adancime	mm 640x850(+65)x290
Greutate netă			kg 48.5
Refrigerant	Tip/GWP		R32/675
	Incarcare		kg/TCO2Eq 1.8/1.215
Dimensiuni țevă refrigerant		Lichid/Gaz	ø mm 6.35(1/4")x3 / 9.52(3/8")x3
Interval de functionare - temperatura exterioara	Racire		°C -15~46
	Incalzire		
Numărul de unități interne conectabile			Min.2~Max.3
Capacitatea totala a unitatilor interioare (kW)			11.0



Unit: mm

Models SCM50ZS-W, 60ZS-W

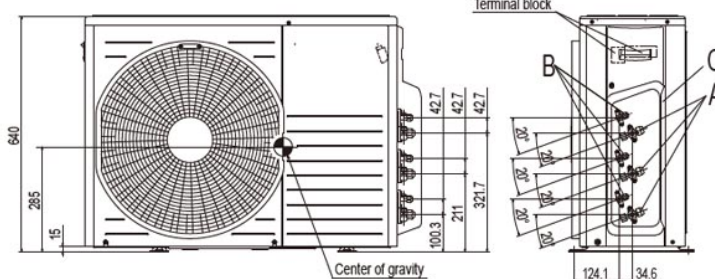

Notes

- (1) The unit must not be surrounded by walls on the four sides.
- (2) The unit must be fixed with anchor bolts. An anchor bolt must not protrude more than 15mm.
- (3) If the unit is installed in the location where there is a possibility of strong winds, place the unit such that the direction of air from the outlet gets perpendicular to the wind direction.
- (4) Leave 200mm or more space above the unit.
- (5) The wall height on the outlet side should be 1200mm or less.
- (6) The model name label is attached on the right side of the unit.

Symbol	Content
A	Service valve connection (gas side) $\phi 0.52(3/8)$ (Flare)
B	Service valve connection (liquid side) $\phi 0.35(1/4)$ (Flare)
C	Pipe/cable draw-out hole
D	Drain discharge hole $\phi 20 \times 2$ places
F	Anchor bolt hole M10-12 $\times 4$ places

	Installation space
L1	600 or more
L2	100 or more
L3	100 or more
L4	No obstacles (Service space or electrical parts)